


# Temperature Measurement Test

## LL2312801A-I

This test report was issued by LightLab International without alterations or amendments

Page 1 of 7





**Test Report Number LL2312801A-I**

<b>Client</b>	Western Power 363 Wellington Street, Perth, WA 6000.
<b>Contact</b>	Thomas Marchant
<b>Sample Description</b>	A 42 W LED replacement lamp mounted in a weathered Sylvania Urban 125MV HPF PEB 240 V 50 Hz streetlantern. The streetlantern comprises: cast aluminium housing with black plastic backshell, clear lens with prismatic section & two specular peened side reflectors. The original Tridonic OMB125-05 iron-core ballast and PF correction capacitor remained in circuit for testing (the photocell did not form part of sample as received). The spigot was horizontal. The Philips 9290020065 220-240Vac 50/60Hz 42W 3000K 5700lm integrated replacement lamp was mounted with one face of the aluminium fascia directed towards the nadir.
<b>Reference Document Summary</b>	No reference document is defined for this test
<b>Nature of Tests</b>	To determine the maximum value of Tc for an LED replacement lamp in a customer supplied streetlight fitting, Measurement methods and conditions in accordance with the standards noted in the Observations and Determinations table:  - the sample supply voltage and frequency were set to the input values noted in the Observations and Determinations table. - lamp Tc was measured - driver Tc was measured
<b>Sample Selection</b>	This laboratory has not exercised control over the selection of samples to be tested. The significance of the report is limited to the extent that the sample is representative of the population.
<b>Applicability</b>	The results apply only to the sample that was tested.
<b>Uncertainties</b>	Uncertainties available on request.
<b>Procedure Details</b>	LightLab procedure Test-B3038. Testing was performed in a draught free, controlled environment. The sample was energised and operated until it reached thermal and electrical stability prior to measurements being performed. Observations and determinations relevant to the test are listed in the Observations and Determinations Table. Measurements are recorded in the Measurements Table.
<b>Results of Tests</b>	Compliance not relevant to the tests. Refer to the tables for test conditions, determinations and measurements.


**Authorised Signatory**  
  
\_\_\_\_\_  
P. Lawrance

Date of Test 9<sup>th</sup> May, 2023  
Date of Report 5<sup>th</sup> Jun, 2023

B3007 ISTM Report & 60598-1 12.4 report, V5.1, 15<sup>th</sup> Mar 21

This test report was issued by LightLab International without alterations or amendments






**Test Report Number LL2312801A-I**

Observation	Determination
Standard(s) tested	(a) ASNZS60598.1:2017 section 12.4.1 excepting: clause 12.4.1 (d) & applicable 60598-2-X document  Temperature measurement points limited to those listed in the results section. Ambient temperature not set to the T <sub>a</sub> rating of the luminaire Supply voltage set to 240 V 50 Hz.
Sample (manufacturer, model)	Sylvania – Urban 125MV HPF PEB
Integrated LED lamp (manufacturer, model)	Philips - 9290020065
Manufacturer's installation instructions	Not supplied
Luminaire type specific observations	Spigot mount luminaire
Sample mounting	Horizontal
Sample T <sub>a</sub> rating	40°C , tested at 25°C per customer instructions
Sample electrical input rating	240 V 50 Hz
Supply setpoint	240 V 50 Hz
Luminaire configuration	As supplied
Lamp T <sub>c</sub> location	

Observations & Determinations Table

This test report was issued by LightLab International without alterations or amendments






**Test Report Number LL2312801A-I**

Electrical & environment		Temperatures <sup>(1)</sup>	
Supply Voltage (ac)	240 V	Driver Tc point (TC #1)	86.8 °C
Supply Power	38.4 W	Driver Tc point (TC #2)	34.6 °C
Supply Current (ac)	460 mA	LED Tc (TC #3)	34.8 °C
Supply Frequency	50 Hz	Lamp chamber T (TC #4)	45.7 °C
Power Factor	0.35		
Measured Ambient Temperature	24.8 °C		
Stabilisation time *	20.5 hours		
Test duration *	0.5 hours		

Measurements Table

\* NATA accreditation does not cover the performance of this service.


<sup>(1)</sup> All temperature measurements, apart from Measured Ambient, have been normalised to 25°C.

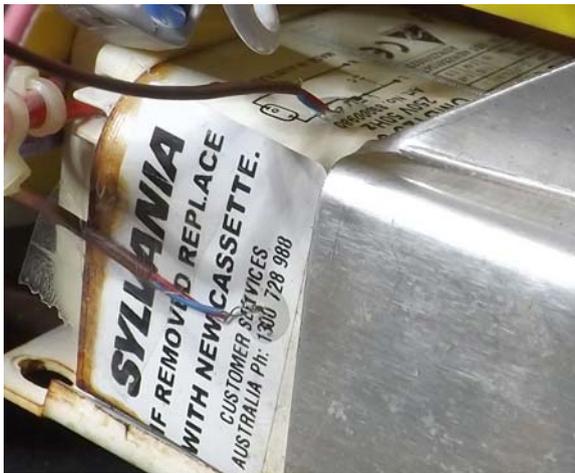

Thermocouple attachment points


This test report was issued by LightLab International without alterations or amendments






Test Report Number LL2312801A-I

Photographs:

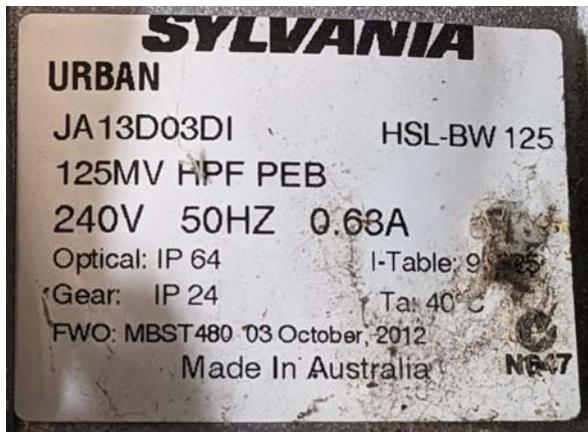

This test report was issued by LightLab International without alterations or amendments





Test Report Number LL2312801A-I

Thermocouple placement:

TC# 1



TC# 2



TC# 3




TC# 4



This test report was issued by LightLab International without alterations or amendments






Test Report Number LL2312801A-I

Annex 1 – External documents

Extract from “Technical application guide – Philips TrueForce LED Urban” dated 01/2019, Published by Philips Lighting. Extract shows data for lamp, including expected lifetime of the lamp vs case temperature.


TForce LED HPL ND 57-42W E40 830 1 x 5700 lm

Light output ratio 1.00 CIE flux code 11 36 67 51 100  
Service upward 0.49  
Service downward 0.51



TForce LED HPL ND 60-42W E40 840 1 x 6000 lm


Light output ratio 1.00 CIE flux code 11 36 67 51 100  
Service upward 0.49  
Service downward 0.51




Lifetime + Sustainability

21W 3000ml


Lifetime vs. Failure Rate @ Ta 25 °C

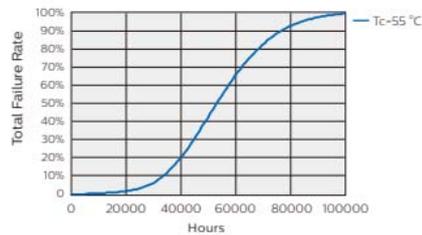


Lifetime and Lumen Maintenance

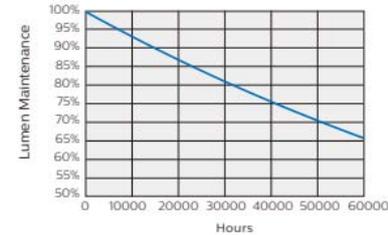

Failure Rate vs. Lifetime vs. Tcase

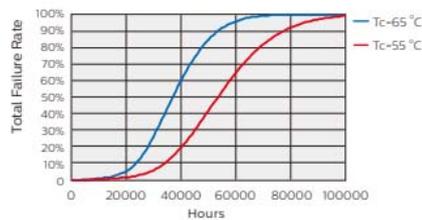

Lifetime vs. Tcase

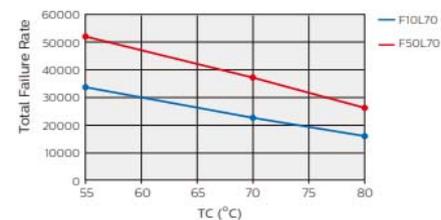

- Philips TrueForce LED Public lamp has a lifetime of 50,000 hours, defined as the number of hours when 50% of a large group of identical lamps below 70% of its initial lumens.

- Lifetime estimation based on the application environment condition: please refer to the Tc for lifetime forecast.

